

# Lito Wall Light

## Technical Specifications



## Product Details

### Lighting Specifications

3K Warm white  
12 Watts per metre  
1140 Lumens per metre  
24 Volt  
Dimmable  
IP54 Rated

**Please note:**  
Each light includes  
an auxiliary dimmable  
transformer.

**Note for electrician:**  
White cable wire = Positive  
Clear cable wire = Negative

### Material

Solid Brass

### Finishes

Aged Brass  
Dark Antique  
Blackened Brass

**Please note:**  
All finishes are  
sealed with a clear  
satin lacquer unless  
specified otherwise.

### Product Dimensions (mm)

400 H  
600 H

## Lito Wall Light

## Technical Specifications

---

## Product Care

---

- **DO NOT USE** cleaning products, oils, and other polishes as they may cause permanent damage.
- Regular gentle care and maintenance will preserve and extend the life of your product.
- We suggest cleaning weekly, remove dust with a dry soft microfibre cloth, a damp microfibre cloth may be also be used for tougher areas.
- We recommend only using water.
- Do not leave moisture, cleaning products, or solutions on the surface of our products as they may erode the lacquer.
- We recommend wearing gloves when installing and cleaning your products.


### Product Details

#### Wire Specifications and Dimensions (for 400mm high Lito Wall Light)

#### Transformer Specifications

**Wattage:** 20

**Dimensions:** 110 x 45 x 25mm

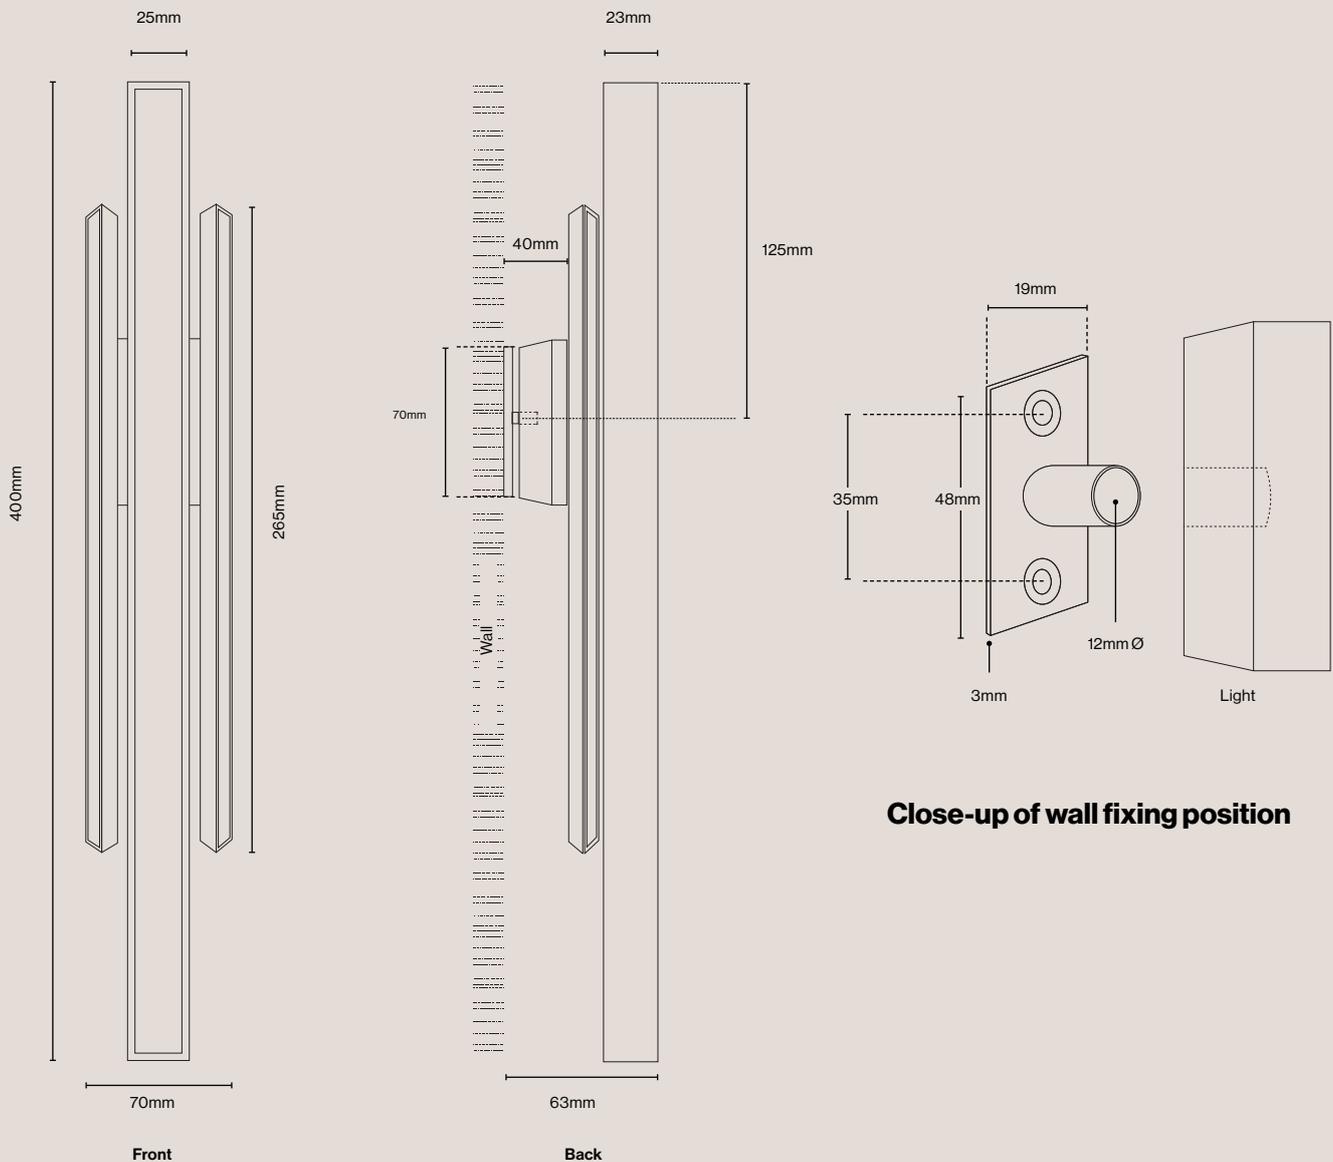

**Close-up of wall fixing position**


### Product Details

#### Wire Specifications and Dimensions (for 600mm high Lito Wall Light)

#### Transformer Specifications

**Wattage:** 20

**Dimensions:** 110 x 45 x 25mm

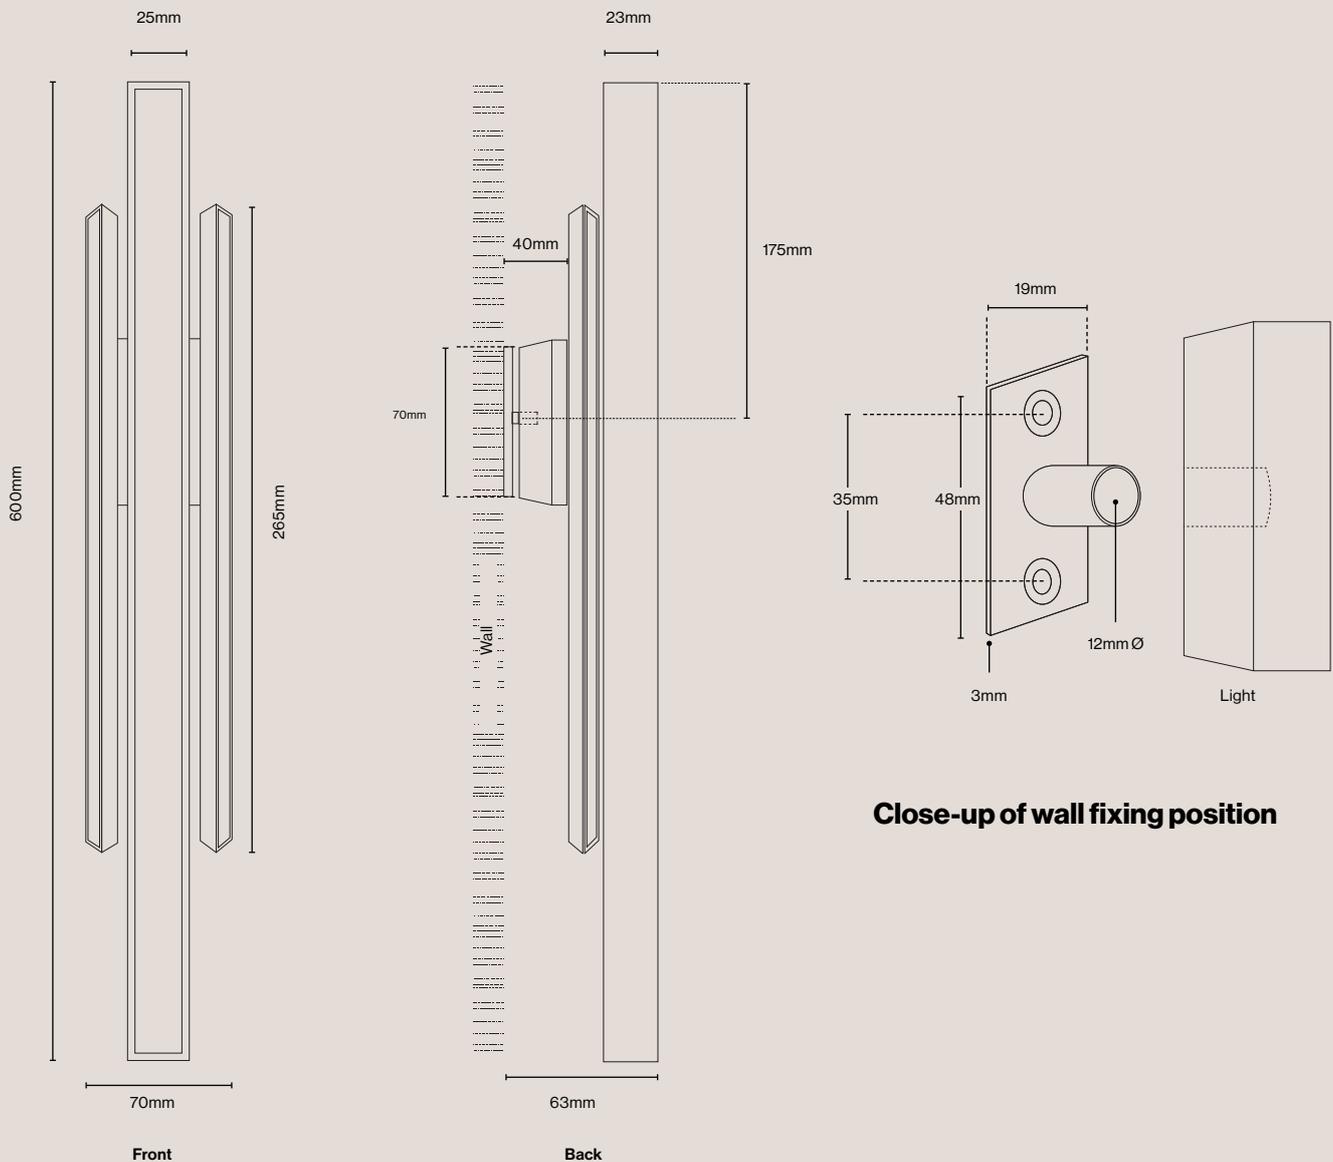

**Close-up of wall fixing position**

## Installation Guide (400 and 600mm)

---

1. Locate and remove the wall mounting bracket from the rear of the Lito Wall Light.
2. Confirm the mounting position and pre-drill fixing holes where required.
3. Secure the wall mounting bracket in the desired position, ensuring it is level.
4. Remove the two brass M5 countersunk (CSK) screws located at the top of the hexagonal body and carefully remove the cap.
5. Connect the clear cable tails to the driver, ensuring correct polarity (white line = positive).
6. Slide the Lito Wall Light onto the wall mounting bracket and check that the fitting is level.
7. Secure the fitting by tightening the M5 grub screw identified earlier. Tighten firmly, taking care not to over-tighten.
8. Refit the cap and secure using the two brass M5 CSK screws.

**NOTE:** Locate the M5 grub screw inside the 6 mm access hole at the top of the hexagonal body. This grub screw is required to secure the light to the wall mounting bracket.

## Safety & Compliance

---

- Installation must be carried out by a **qualified electrician** in accordance with **AS/NZS 3000 Wiring Rules** and all applicable local regulations.
- Isolate mains power before commencing installation or maintenance.
- This light is designed for **interior use only**, unless otherwise specified.
- Ensure all electrical connections are secure and that no cables are trapped or under tension during installation.
- Do not modify the light. Use only supplied components and approved accessories.
- Clean only with a soft, dry cloth. Do not use abrasive cleaners or solvents.