

Luna Wall Light

Technical Specifications



Product Details

Lighting Specifications

3K Warm white
12 Watts per metre
1140 Lumens per metre
24 Volt
Dimmable
IP54 Rated

Please note:
Each light includes
an auxiliary dimmable
transformer.

Note for electrician:
White cable wire = Positive
Clear cable wire = Negative

Material

Solid Brass

Finishes

Aged Brass
Dark Antique
Blackened Brass

Please note:
All finishes are
sealed with a clear
satin lacquer unless
specified otherwise.

Product Dimensions (mm)

150 Diameter
180 Diameter

Luna Wall Light

Technical Specifications

Product Care

- **DO NOT USE** cleaning products, oils, and other polishes as they may cause permanent damage.
- Regular gentle care and maintenance will preserve and extend the life of your product.
- We suggest cleaning weekly, remove dust with a dry soft microfibre cloth, a damp microfibre cloth may be also be used for tougher areas.
- We recommend only using water.
- Do not leave moisture, cleaning products, or solutions on the surface of our products as they may erode the lacquer.
- We recommend wearing gloves when installing and cleaning your products.


Product Details

Wire Specifications and Dimensions (for 150mm diameter Luna Wall Light)


Transformer Specifications

Wattage: 20

Dimensions: 110 x 45 x 25mm

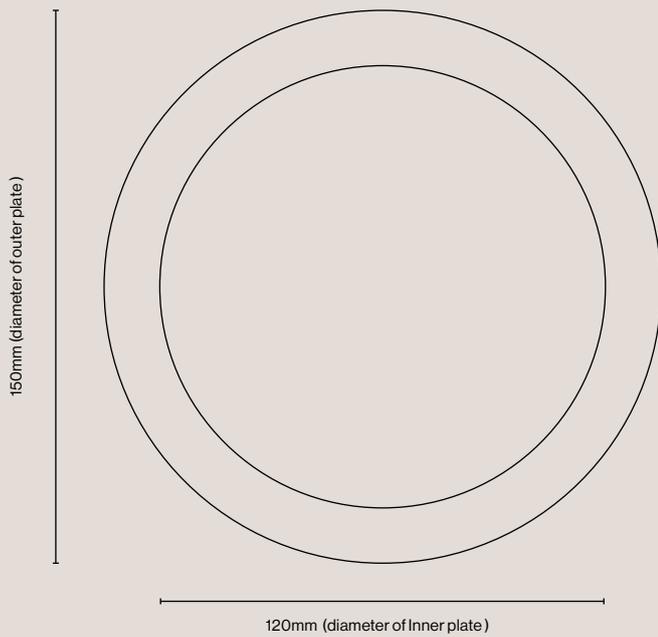

Exterior of Luna Wall Light

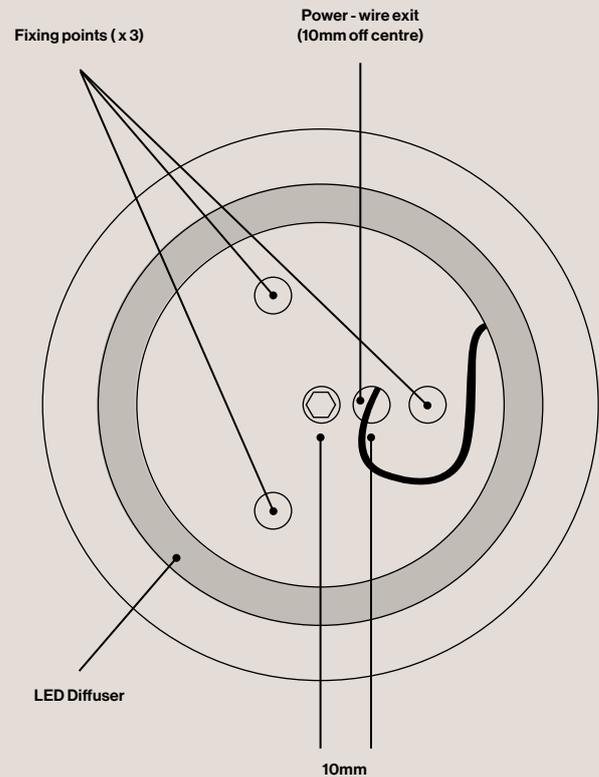

Interior of Luna Wall Light


Product Details

Wire Specifications and Dimensions (for 180mm diameter Luna Wall Light)


Transformer Specifications

Wattage: 20

Dimensions: 110 x 45 x 25mm

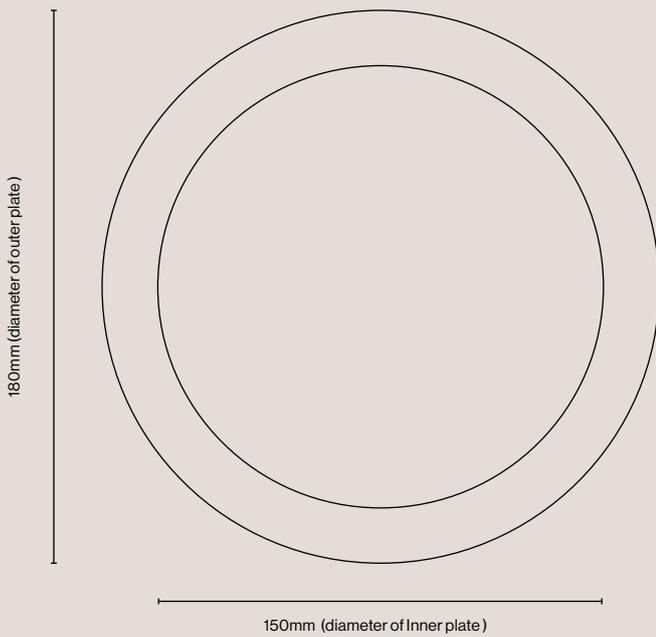

Exterior of Luna Wall Light

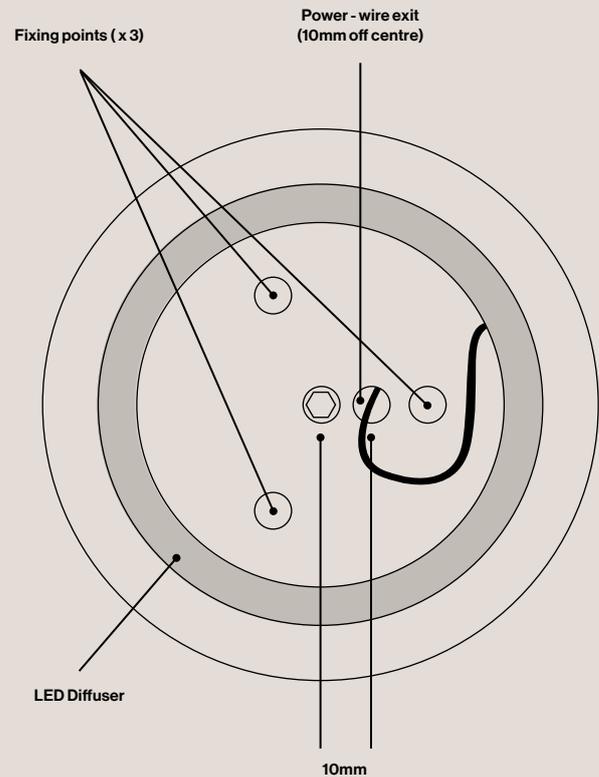

Interior of Luna Wall Light

Installation Guide (150 and 180 diameter)

1. Remove the front faceplate of the Luna Wall Light by rotating it anti-clockwise.
2. Confirm the mounting position and pre-drill fixing holes where required.
3. Connect the clear cable tails to the driver, ensuring correct polarity (white line = positive).
4. Secure the Luna Wall Light to the desired location using the three fixing points provided.
5. Refit the front faceplate by rotating it clockwise until secure. Tighten firmly, taking care not to over-tighten.

Safety & Compliance

- Installation must be carried out by a **qualified electrician** in accordance with **AS/NZS 3000 Wiring Rules** and all applicable local regulations.
- Isolate mains power before commencing installation or maintenance.
- This light is designed for **interior use only**, unless otherwise specified.
- Ensure all electrical connections are secure and that no cables are trapped or under tension during installation.
- Do not modify the light. Use only supplied components and approved accessories.
- Clean only with a soft, dry cloth. Do not use abrasive cleaners or solvents.