

Link Wall Light

Technical Specifications



Product Details

Lighting Specifications

3K Warm white
12 Watts per metre
1140 Lumens per metre
24 Volt
Dimmable
IP54 Rated

Please note:

Each light includes an auxiliary dimmable transformer.

Note for electrician:

White cable wire = Positive
Clear cable wire = Negative

Material

Solid Brass

Finishes

Aged Brass
Dark Antique
Blackened Brass

Please note:

All finishes are sealed with a clear satin lacquer unless specified otherwise.

Product Dimensions (mm)

400 L x 25W x 23 D
600 L x 25W x 23 D

Link Wall Light

Technical Specifications

Product Care

- **DO NOT USE** cleaning products, oils, and other polishes as they may cause permanent damage.
- Regular gentle care and maintenance will preserve and extend the life of your product.
- We suggest cleaning weekly, remove dust with a dry soft microfibre cloth, a damp microfibre cloth may be also be used for tougher areas.
- We recommend only using water.
- Do not leave moisture, cleaning products, or solutions on the surface of our products as they may erode the lacquer.
- We recommend wearing gloves when installing and cleaning your products.



Product Details

Wire Specifications and Dimensions (for 400mm long Link Wall Light)

Transformer Specifications

Wattage: 20

Dimensions: 110 x 45 x 25mm

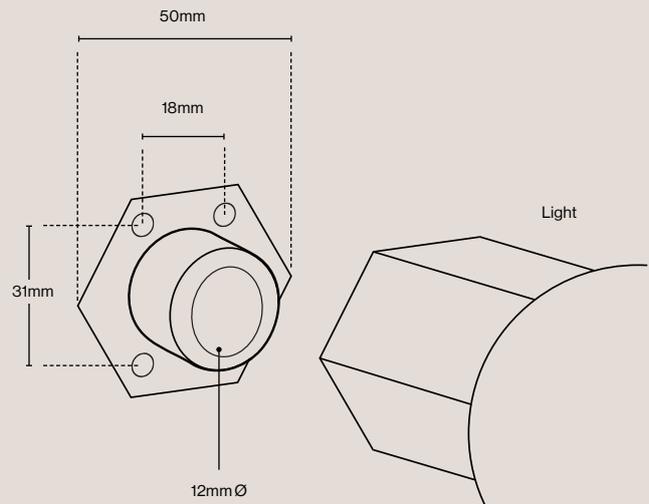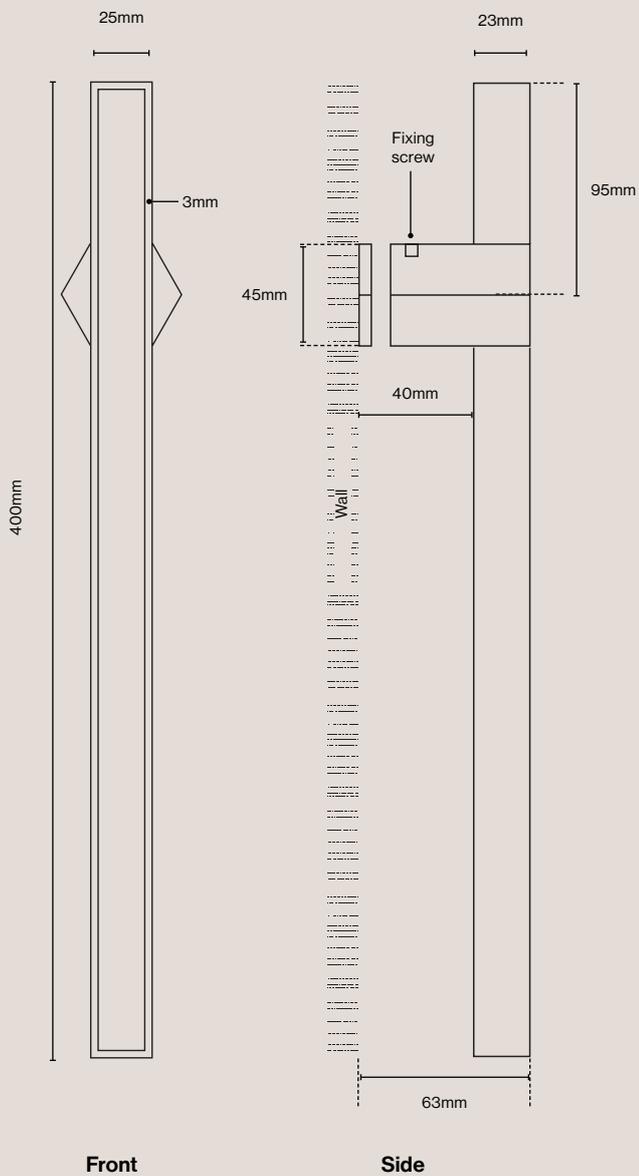

Close-up of wall fixing position



Product Details

Wire Specifications and Dimensions (for 600mm long Link Wall Light)

Transformer Specifications

Wattage: 20

Dimensions: 110 x 45 x 25mm

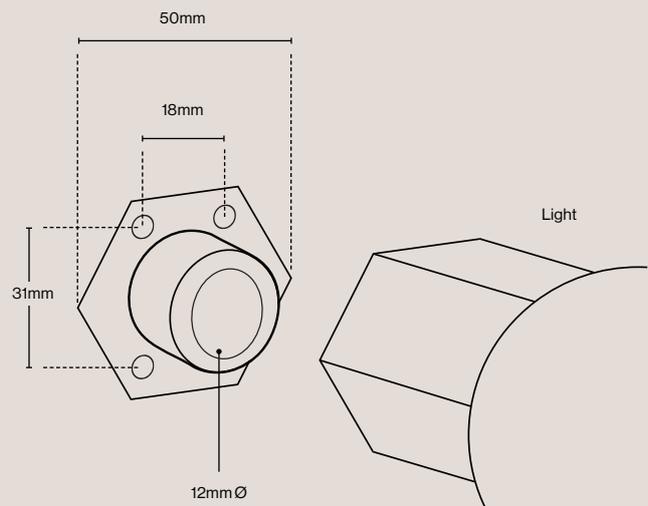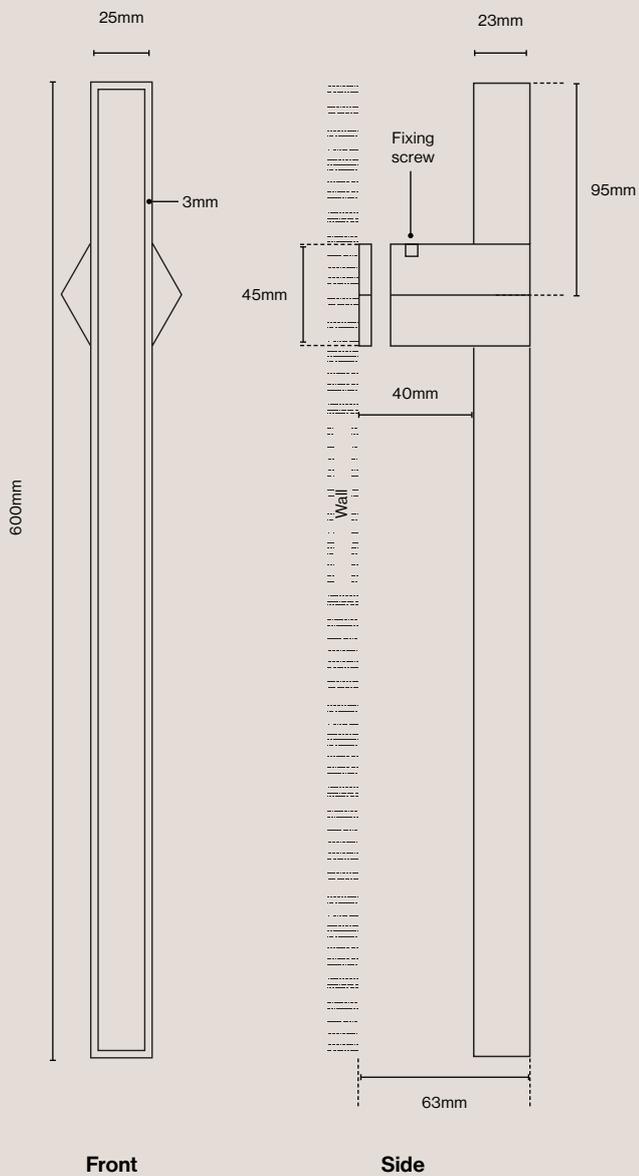

Close-up of wall fixing position

Installation Guide (400 and 600mm)

1. Locate and remove the hexagonal wall mounting bracket from the rear of the Link Wall Light.
2. Confirm the mounting position and pre-drill fixing holes where required.
3. Secure the wall mounting bracket in the desired location, ensuring it is level. **IMPORTANT:** Take care during this step to achieve a seamless fit between the light and the wall mounting bracket.
4. Connect the clear cable tails to the driver, ensuring correct polarity (white line = positive)
5. Locate the M5 grub screw on the underside of the hexagonal light block. This grub screw is required to secure the light to the wall mounting bracket.
6. Slide the Link Wall Light onto the wall mounting bracket, check that the fitting is level, and ensure the light block and mounting bracket nest neatly together.
7. Secure the fitting by tightening the M5 grub screw identified earlier. Tighten firmly, taking care not to over-tighten.

Safety & Compliance

- Installation must be carried out by a **qualified electrician** in accordance with **AS/NZS 3000 Wiring Rules** and all applicable local regulations.
- Isolate mains power before commencing installation or maintenance.
- This light is designed for **interior use only**, unless otherwise specified.
- Ensure all electrical connections are secure and that no cables are trapped or under tension during installation.
- Do not modify the light. Use only supplied components and approved accessories.
- Clean only with a soft, dry cloth. Do not use abrasive cleaners or solvents.