
Technical Specifications




Product Details

Lighting Specifcations	3K Warm white 19.2 Watts per metre 1140 Lumens per metre 24 Volt Dimmable	Please note Each light includes an auxiliary dimmable transformer.
	Note for electrician: White cable wire = Positive Clear cable wire = Negative	9
Material	Solid Brass	
Finishes	Brushed Brass Aged Brass Blackened Brass	Please note All finishes are sealed with a clear satin lacquer unless specified otherwise.
Product Dimensions (mm)	1800Lx25Hx25D 2200Lx25Hx25D 2800Lx25Hx25D 3200Lx25Hx25D	

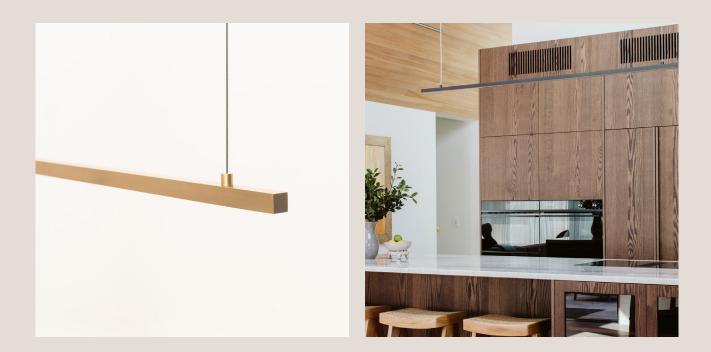

Product Details

Ceiling Rose Detail

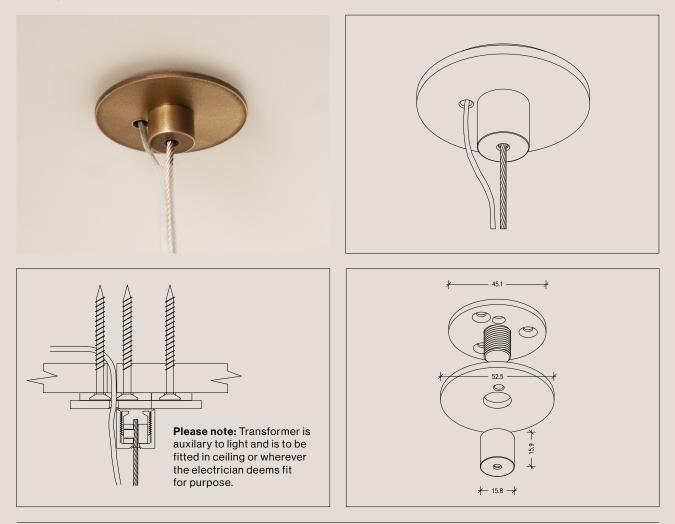

Product Care

- Regular gentle care and maintenance will preserve and extend the life of your product.
- We suggest cleaning weekly, remove dust with a dry soft microfibre cloth, a damp microfibre cloth may be also be used for tougher areas.
- We recommend only using water. Avoid using cleaning products, oils, and other polishes as they may cause permanent damage.
- We recommend wearing gloves when installing and cleaning your products.
- Do not leave moisture, cleaning products, or solutions on the surface of our products as they may erode the lacquer.



Product Details


Wire Specifications (for 1200 - 2000mm long Lateral Pendants) All hanging wires are supplied at standard length of 1.8 metres and electrical cable is supplied at the standard length of 3 metres long.


For lights between 1200 - 2000mm L, the standard hanging wires & electrical cable will be inset 150mm in from each end of the light.

Please note: The electrical cable runs up one of the hanging support wires and both are encased in a clear plastic sleeve.

Transformer Specifications

Wattage: 40 Dimensions: 135 x 50 x 30mm

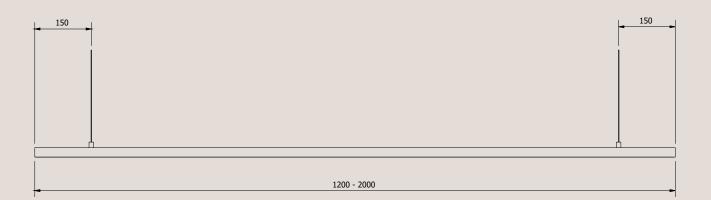





Product Details


Wire Specifications (for 2001 - 2400mm long Lateral Pendants) All hanging wires are supplied at standard length of 1.8 metres and electrical cable is supplied at the standard length of 3 metres long.

For lights between 2001 - 2400mm L, the standard hanging wires & electrical cable will be inset 200mm in from each end of the light.

Please note: The electrical cable runs up one of the hanging support wires and both are encased in a clear plastic sleeve.

Transformer Specifications

Wattage: 60 Dimensions: 135 x 50 x 30mm

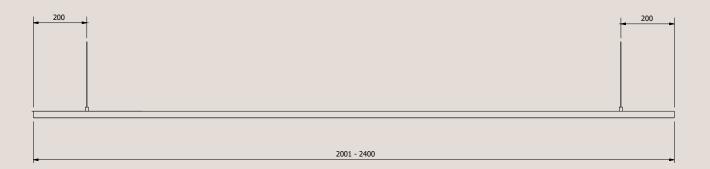



powerSurge

Product Details

Wire Specifications (for 2401 - 2800mm long Lateral Pendants) All hanging wires are supplied at standard length of 1.8 metres and electrical cable is supplied at the standard length of 3 metres long.

For lights between 2401 - 2800mm L, the standard hanging wires & electrical cable will be inset 500mm in from each end of the light.

Please note: The electrical cable runs up one of the hanging support wires and both are encased in a clear plastic sleeve.

Transformer Specifications

Wattage: 60 Dimensions: 135 x 50 x 30mm



Product Details


Wire Specifications (for 2801 - 3000mm long Lateral Pendants) All hanging wires are supplied at standard length of 1.8 metres and electrical cable is supplied at the standard length of 3 metres long.


For lights between 2801 - 3000mm L, the standard hanging wires & electrical cable will be inset 500mm in from each end of the light.

Please note: The electrical cable runs up one of the hanging support wires and both are encased in a clear plastic sleeve.

Transformer Specifications

Wattage: 60 Dimensions: 135 x 50 x 30mm

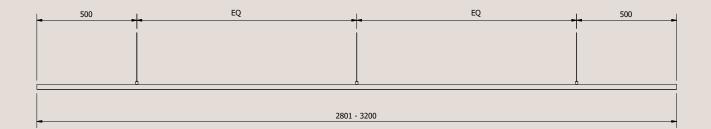



Product Details

Wire Specifications (for 3201 - 3600mm long Lateral Pendants) All hanging wires are supplied at standard length of 1.8 metres and electrical cable is supplied at the standard length of 3 metres long.

For lights between 3201 - 3600mm L, the standard hanging wires & electrical cable will be inset 600mm in from each end of the light.

Please note: The electrical cable runs up one of the hanging support wires and both are encased in a clear plastic sleeve.

Transformer Specifications

Wattage: 80 Dimensions: 170 x 55 x 30mm

